


TYPE 1

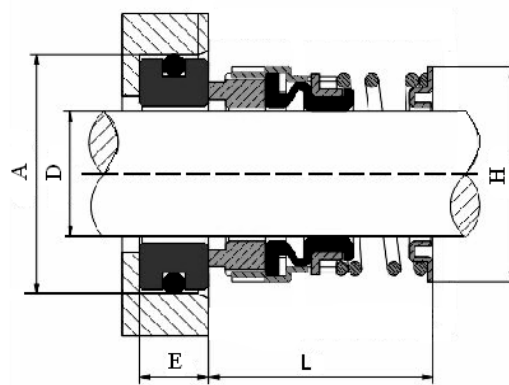

Specification

Temperature : - 20°C ~ 200°C

Pressure : $\leq 28 \text{ kg/cm}^2$

Speed : $\leq 10 \text{ m/sec}$

Shaft D	A	H	L	E
5/8	33.52	27.76	10.29	31.75
3/4	33.52	30.60	10.29	34.93
7/8	35.13	35.00	10.29	38.10
1	39.87	39.00	11.10	41.28
1 1/8	41.48	42.00	11.10	44.45
1 1/4	41.48	45.00	11.10	47.63
1 3/8	43.05	49.00	11.10	50.80
1 1/2	43.05	53.98	11.10	53.98
1 5/8	51.00	58.00	12.70	60.33
1 3/4	51.00	61.00	12.70	63.50
1 7/8	54.17	63.80	12.70	66.68
2	54.17	68.00	12.70	69.85
2 1/8	60.53	71.42	14.27	53.98
2 1/4	60.53	74.60	14.27	57.15
2 3/8	63.70	77.77	14.27	60.33
2 1/2	63.70	80.95	14.27	63.50
2 5/8	70.05	85.73	15.90	66.68
2 3/4	70.05	88.90	15.90	69.85
2 7/8	73.20	92.08	15.90	73.03
3	73.20	95.25	15.90	76.20