


TYPE 2

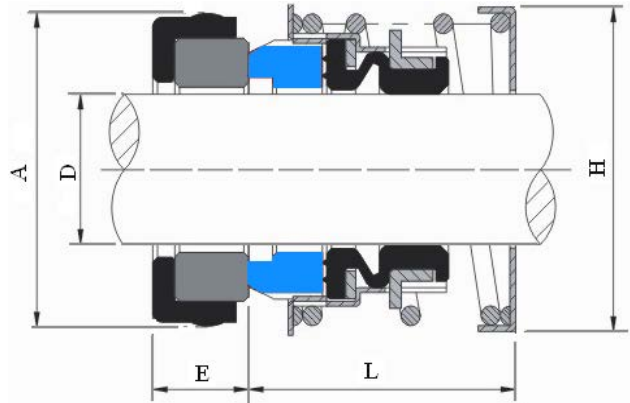

Specification

Temperature : - 20°C ~ 200°C

Pressure : $\leq 28 \text{ kg/cm}^2$

Speed : $\leq 12 \text{ m/sec}$

Shaft D	A	H	L	E
16	30	34.0	25.2	8
18	32	36.8	25.2	8
20	34	38.8	25.2	8
22	36	41.5	25.2	8
25	39	44.8	26.2	8
28	43	48.5	26.2	8
30	48	52.0	26.2	8
35	53	57.0	30.2	10
40	58	67.0	34.2	10
45	63	73.0	36.2	10
50	68	79.0	41.2	10
55	73	84.0	41.2	12
60	79	90.0	41.2	12
65	86	98.5	49.2	12
70	91	103.5	52.2	12
75	96	110.5	52.2	12

Shaft D	A	H	L	E
13	30.95	34.0	25.2	10.3
3/4	34.15	38.8	25.2	10.3
7/8	37.30	41.5	25.2	10.3
1	40.50	44.8	25.2	10.3
1 1/8	47.65	48.5	33.2	11.9
1 1/4	50.80	57.0	33.2	11.9
1 3/8	54.00	57.0	33.2	11.9
1 1/2	57.15	67.0	33.2	11.9
1 5/8	60.35	67.0	33.2	11.9
1 3/4	63.50	73.0	41.2	11.9
1 7/8	66.70	73.0	41.2	11.9
2	69.85	79.0	41.2	13.5
2 1/8	73.05	84.0	41.2	13.5
2 1/4	76.20	84.0	41.2	13.5
2 3/8	79.40	90.0	41.2	13.5
2 1/2	82.55	94.0	41.2	13.5