


# TYPE 502

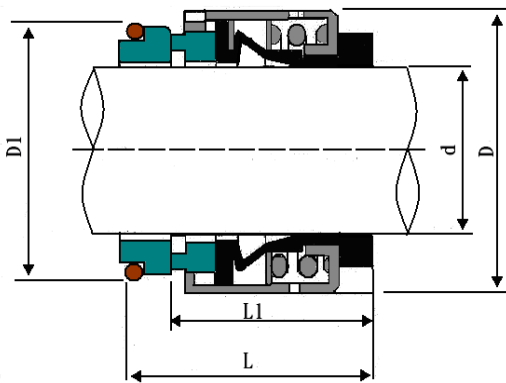

## Specification

Temperature : - 30°C ~ 220°C

Pressure :  $\leq 40 \text{ kg/cm}^2$

Speed :  $\leq 20 \text{ m/sec}$

Medium : Oil, Water and low corrosion mediums

## Standard Materials :

Stationary Ring : Ceramic / SIC / TC

Rotary Ring : Carbon / SIC / TC

Secondary Seal : VITON / NBR / EPDM

Metal parts : SUS304 / SUS316

d	D	D1	L	L1
14	24	25	35.2	23.2
16	26	27	35.2	23.2
18	32	33	37.7	24.2
20	34	35	37.7	24.2
22	36	37	37.7	24.2
24	38	39	40.4	26.9
25	39	40	40.2	27.2
28	42	43	42.7	30.2
30	44	45	42.6	30.7
32	46	48	42.6	30.7
33	47	48	42.6	30.7
35	49	50	42.6	30.7
38	54	56	45.1	32.2
40	56	58	45.1	32.2
43	59	61	45.1	32.2
45	61	63	45.1	32.2
48	64	66	45.1	32.2
50	66	70	47.6	34.2
53	69	73	47.6	34.2
55	71	75	47.6	34.2
58	78	78	47.6	39.2
60	80	80	47.6	39.2
63	83	83	47.6	39.2
65	85	85	47.6	39.2
68	88	90	47.6	39.2
70	89	92	60.2	45.7
75	96	97	60.2	45.7
80	104	105	60.2	45.2
85	108	110	60.2	45.2
90	114	115	65.2	50.2
95	118	120	65.2	50.2
100	124	125	65.2	50.2