


## TYPE 7

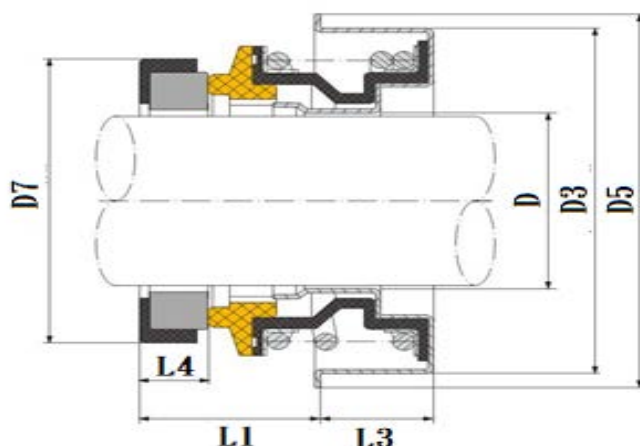

### Operation Conditions (操作條件) :

Temperature (溫度) : -20°C ~ 180°C

Pressure (壓力) :  $\leq 5 \text{ kg/cm}^2$  (vacuum degree reached to 750mmHg)

Speed (轉速) : 15 m/s

### Standard Materials (標準材質) :

Stationary Ring (靜止環) : Carbon / SIC

Rotary Ring (迴轉環) : Ceramic / SIC

Secondary Seal (密封圈) : NBR / VITON

Metal parts (金屬零件) : SUS 304 / SUS316

### Applications (應用範圍) :

- ◆ Cooling pump
- ◆ Household pump
- ◆ General pump
- ◆ Small-typed centrifugal pump

Shaft D	L1	L3	L4	D3	D7	D5
7-13	10.20	8.00	5.00	28.55	25.00	31.70
7-17	11.80	8.00	5.00	36.45	31.00	41.30
7-20	11.00	9.50	5.00	40.00	35.00	43.70
7-25	15.00	11.00	8.00	47.00	46.00	51.00
7-30	16.00	11.00	8.00	52.00	48.00	57.00

