


# TYPE 8U

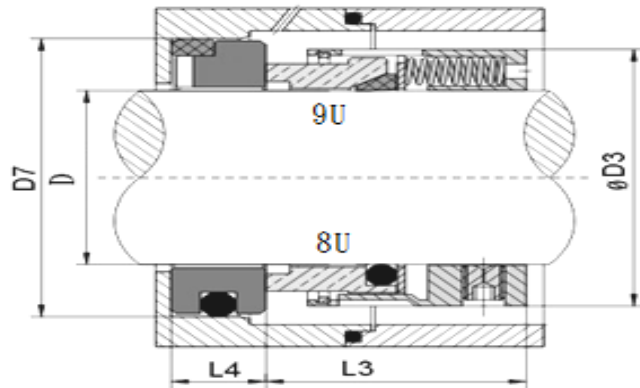

## Specification

Temperature : - 20°C ~ 200°C

Pressure : ≤ 12 kg/cm<sup>2</sup>

Speed : ≤ 20 m/sec

Rotary Ring (SiC/TC/Carbon)

Stationary Ring (SiC/TC)

Secondary Seal (NBR/VITON/TEFLON)

Spring & Other Parts (SUS304/SUS316)

Shaft D	D7	L4	L3	D3
5/8	1.250	0.406	0.750	1.187
3/4	1.375	0.406	0.875	1.312
7/8	1.500	0.406	0.937	1.437
1	1.625	0.437	1.000	1.562
1 1/8	1.750	0.437	1.062	1.687
1 1/4	1.875	0.437	1.062	1.875
1 3/8	2.000	0.437	1.125	2.000
1 1/2	2.125	0.437	1.125	2.125
1 5/8	2.375	0.500	1.375	2.375
1 3/4	2.500	0.500	1.375	2.500
1 7/8	2.625	0.500	1.375	2.625
2	2.750	0.500	1.375	2.750
2 1/8	3.000	0.562	1.687	3.000
2 1/4	3.125	0.562	1.687	3.125
2 3/8	3.250	0.562	1.687	3.250
2 1/2	3.375	0.562	1.687	3.375
2 5/8	3.375	0.625	1.687	3.500
2 3/4	3.500	0.625	1.687	3.625
2 7/8	3.750	0.625	1.687	3.750
3	3.875	0.625	1.687	3.812

Shaft D	D7	L4	L3	D3
14	25	12.0	23.2	24
16	27	12.0	23.2	26
18	33	13.5	24.2	32
20	35	13.5	24.2	34
22	37	13.5	24.2	36
24	39	13.5	26.9	38
25	40	13.0	27.2	39
28	43	12.5	30.2	42
30	45	12.0	30.7	44
32	48	12.0	30.7	46
33	48	12.0	30.7	47
35	50	12.0	30.7	49
38	56	13.0	32.2	54
40	58	13.0	32.2	56
43	61	13.0	32.2	59
45	63	13.0	32.2	61
48	66	13.0	32.2	64
50	70	13.5	34.2	66
53	73	13.5	34.2	69
55	75	13.5	34.2	71
58	78	13.5	39.2	78
60	80	13.5	39.2	80
63	83	13.5	39.2	83