


TYPE 11A

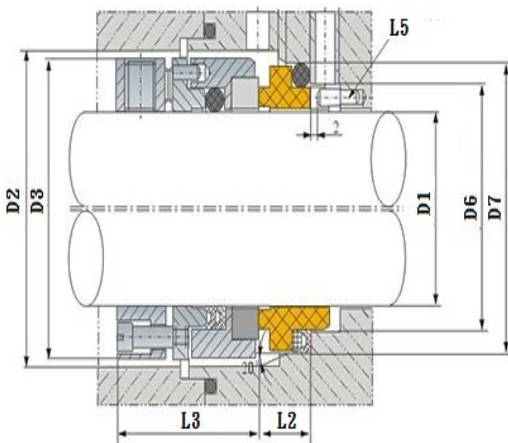

Specification

Temperature : - 60°C ~ 250°C

Pressure : $\leq 12 \text{ kg/cm}^2$

Speed : $\leq 25 \text{ m/sec}$

Standard Materials :

Rotary Ring : (SiC/TC)

Stationary Ring : (Carbon/SiC/TC)

Secondary Seal : (NBR/VITON/PTFE)

Spring & Other Parts : (SUS304/SUS316)

D1	D2	D3	D6	D7	L2	L3	L5
20	36	34	29	35	13	35	3
22	38	36	31	37	13	35	3
24	40	38	33	39	13	35	3
25	41	39	34	40	13	35	3
28	44	42	37	43	13	35	3
30	46	44	39	45	13	35	3
32	48	46	42	48	13	35	3
33	49	47	42	48	13	35	3
35	51	49	44	50	13	35	3
38	58	54	50	56	13	38	4
40	60	56	52	58	13	38	4
43	63	59	55	61	13	38	4
45	65	61	57	63	13	38	4
48	68	64	60	66	13	38	4
50	70	66	62	68	13	39	4
53	73	69	65	71	13	40	4
55	75	71	67	73	13	40	4
58	83	76	70	79	16	41	4
60	85	78	72	81	16	41	4
63	88	81	75	84	16	41	4
65	90	83	77	86	16	41	4
68	93	86	81	90	16	41	4
70	95	90	83	92	16	42	4
75	104	95	88	97	16	42	4
80	109	100	96	105	16	42	4
85	114	105	101	110	16	43	4
90	119	110	106	115	16	45	4
95	124	115	111	120	16	45	4
100	129	120	116	125	16	45	4