


TYPE 9B

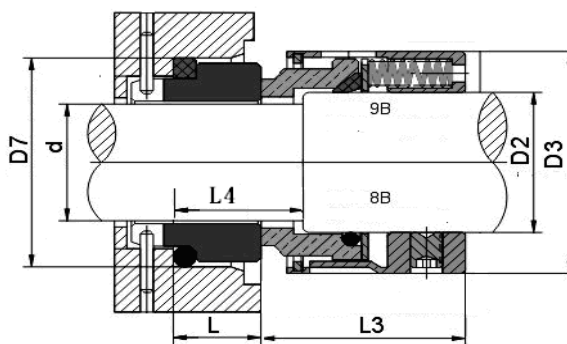

Specification

Temperature : - 20°C ~ 200°C

Pressure : ≤ 25 kg/cm²

Speed : ≤ 25 m/sec

Rotary Ring (SiC/TC/Carbon)

Stationary Ring (SiC/TC)

Secondary Seal (NBR/VITON/PTFE)

Spring & Other Parts (SUS304/SUS316)

Shaft d	D2	D3	D7	L	L3	L4
14	18	32	25	12.0	30.7	18
16	20	34	27	12.0	30.7	18
18	22	36	33	13.5	31.7	20
20	24	38	35	13.5	31.7	20
22	26	40	37	13.5	31.7	20
24	28	42	39	13.5	34.4	20
25	30	44	40	13.0	34.7	20
28	33	47	43	12.5	37.7	20
30	35	49	45	12.0	38.2	20
32	38	54	48	12.0	38.2	20
33	38	54	48	12.0	38.2	20
35	40	56	50	12.0	38.2	20
38	43	59	56	13.0	39.7	23
40	45	61	58	13.0	39.7	23
43	48	64	61	13.0	39.7	23
45	50	66	63	13.0	39.7	23
48	53	63	66	13.0	39.7	23
50	55	71	70	13.5	44.2	25
53	58	78	73	13.5	44.2	25
55	60	80	75	13.5	44.2	25
58	63	83	78	13.5	49.2	25
60	65	85	80	13.5	49.2	25
63	68	88	83	13.5	49.2	25
65	70	90	85	13.5	49.2	25
70	75	95	92	14.5	55.7	28