


TYPE 7C16/C17

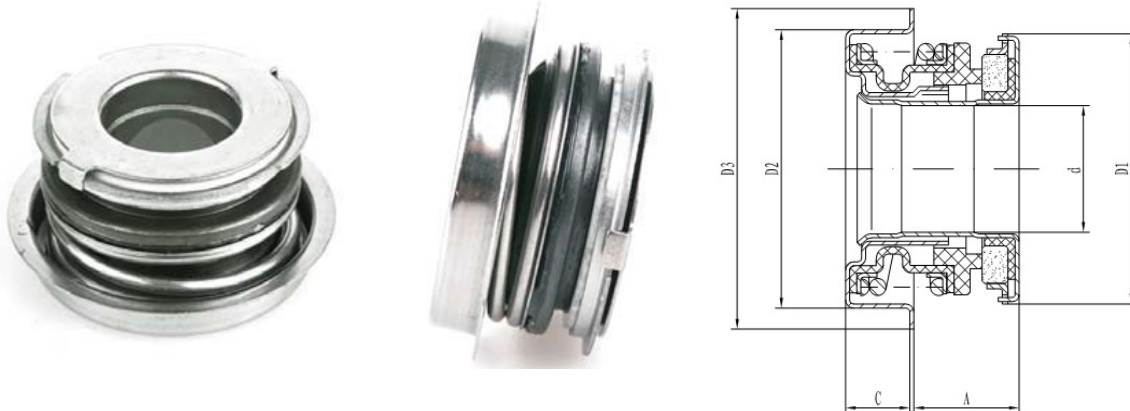

Specification

Temperature : - 35°C ~ 135°C

Pressure : $\leq 0.3\text{MPa}$

Speed : $\phi 16 \leq 6000\text{r/min}$; $\phi 17 \leq 5300\text{r/min}$

MATERIAL

Parts & Spring : Stainless Steel

Rubber parts : NBR & HNBR

Stationary Ring : Carbon/Silicon Carbide

Rotary Ring : Ceramic/Silicon Carbide

Model	d	A	C	D1	D2	D3
7C-0	15.918	12.3	7.1	33	34.2	39.5
7CC-a	15.918	11.84	5.7	33	34.2	39.5
7C-0	17	13.6	8	33	35	41