
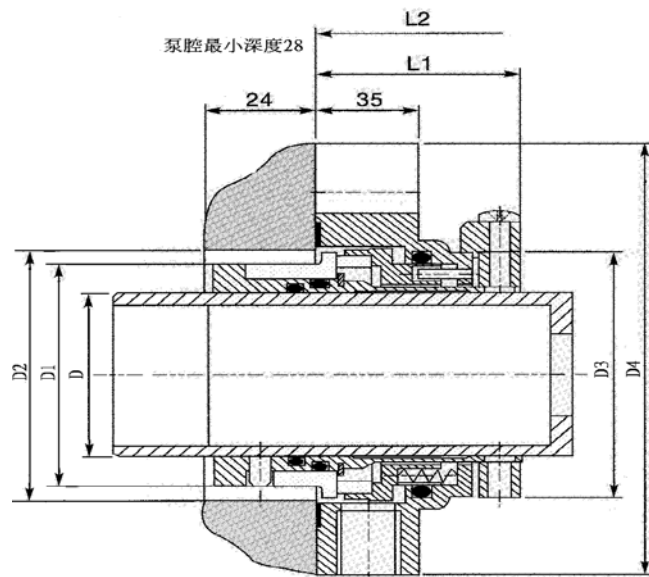


TYPE GE

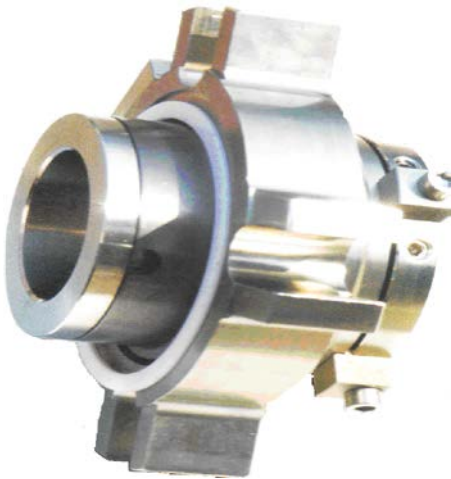

Specification

Temperature: $-20^{\circ}\text{C} \sim 200^{\circ}\text{C}$

Pressure: $\leq 25\text{kg/cm}^2$

Speed: $\leq 23\text{m/sec}$

Shaft D	D1	D2min	D2max	D3	D4	L1	L2	M10	M12	M16	M20
25	38	40	51	45	94-95	48	51	70			
28	41	45	54	48	97-98	48	51	73			
30	45	48	57	51	106-108	48	51	76			
35	48	50	60	54	106-108	48	51	79			
38	54	58	67	60	119-121	48	51	87			
40	57	60	70	64	119-121	48	51	90			
45	61	64	73	67	125-127	48	51	92			
50	67	70	79	73	129-130	48	51		103	108	
55	70	73	83	76	151-152	48	51		106	111	
60	79	83	92	86	160-162	51	54		116	121	
65	86	89	98	92	183-184	51	54		122	127	133
70	89	92	102	95	195-197	51	54		125	132	137
75	96	98	108	102	205-206	51	54			137	143
80	99	102	111	105	208-210	51	54			140	146
85	105	108	118	111	214-216	51	54			146	152
90	111	114	124	118	221-222	51	54			152	159
95	114	117	127	121	224-226	51	54			155	162
100	121	124	133	127	227-229	51	54			162	168