


TYPE 552

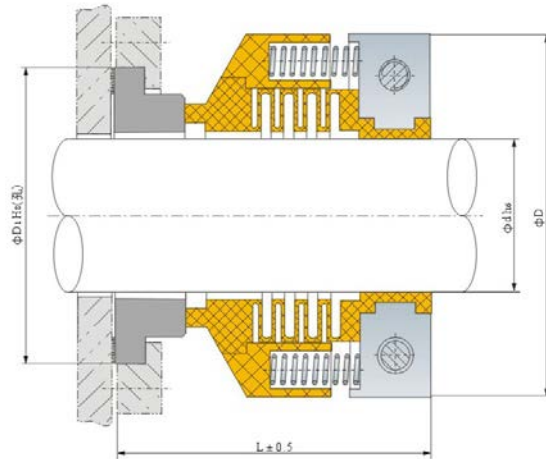

Specification

Temperature : $-20^{\circ}\text{C} \sim 125^{\circ}\text{C}$

Pressure : $\leq 5 \text{ kg/cm}^2$

Speed : $\leq 14 \text{ m/sec}$

Standard Materials :

Stationary Ring : Ceramic / SIC

Rotary Ring : TEFLON / SIC

Secondary Seal : TEFLON

Metal Parts : Steel

| d | D | D1 | L |
|----|-----|------|----|
| 30 | 75 | 53.0 | 59 |
| 35 | 80 | 58.0 | 59 |
| 40 | 85 | 63.0 | 59 |
| 45 | 90 | 68.0 | 62 |
| 50 | 95 | 73.0 | 62 |
| 55 | 100 | 78.0 | 62 |
| 60 | 105 | 83.0 | 62 |
| 65 | 110 | 88.0 | 62 |
| 70 | 115 | 93.0 | 62 |