


TYPE 6U

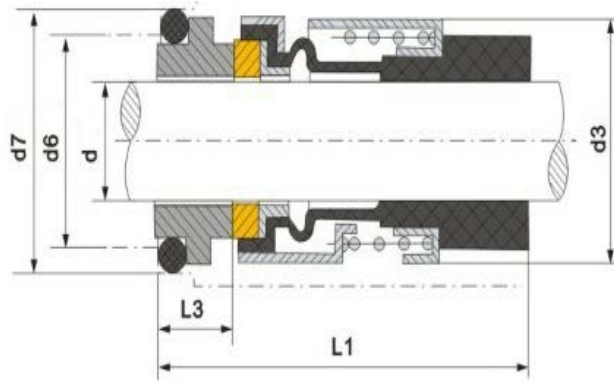

Specification

Temperature: $-30^{\circ}\text{C} \sim 200^{\circ}\text{C}$

Pressure: $\leq 1.2\text{MPa}$

Speed: $\leq 10\text{m/sec}$

Standard Materials :

Stationary Ring : Ceramic / SIC / TC

Rotary Ring : Carbon / SIC / TC

Secondary Seal : NBR / VITON

Metal parts : SUS 304 / SUS316

d	d3	d6	d7	L1	L3
12	22	19	23	34	7.6
14	24	21	25	40.6	6.6
15	26	23	27	39	8.7
16	26	23	27	39	8.7