


TYPE 1

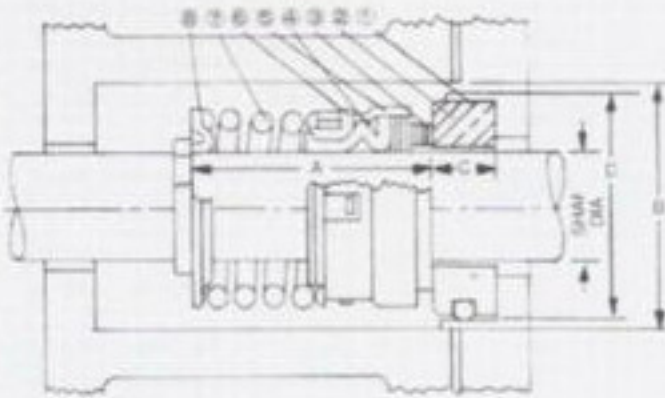

Specification

Used pressure: Below 28kg/cm²
 Revolution speed: Below 4,000 R.P.M.
 Temperature: 90°C (max, 120°C/short time)
 Fluids: Water, Lower alkali liquid,
 Warm water, Lubricant.

Usage

Centrifugal pump
 Revolution pump and transparency pump
 Mixer
 Speed retractor

Sizes In Inches

Shaft Dia	A	B	C	D
3/8	1 3/16	1 1/16	5/16	.875
1/2	1 3/16	1 3/16	5/16	1.000
5/8	1 5/16	1 11/32	13/32	1.250
11/16	1 5/16	1 13/32	13/32	1.312
3/4	1 5/16	1 15/32	13/32	1.375
13/16	1 3/8	1 9/16	13/32	1.437
7/8	1 3/8	1 21/32	13/32	1.500
15/16	1 9/16	1 11/16	7/16	1.562
1	1 9/16	1 3/4	7/16	1.625
1 1/16	1 5/8	1 13/16	7/16	1.687
1 1/8	1 5/8	1 7/8	7/16	1.750
1 3/16	1 5/8	1 15/16	7/16	1.812
1 1/4	1 5/8	2	7/16	1.875
1 3/8	1 11/16	2 1/8	7/16	2.000
1 7/16	1 11/16	2 3/16	7/16	2.062
1 1/2	1 11/16	2 1/4	7/16	2.125
1 5/8	2	2 1/2	1/2	2.375
1 3/4	2	2 5/8	1/2	2.500
1 7/8	2 1/8	2 3/4	1/2	2.625
1 15/16	2 1/8	2 13/16	1/2	2.687
2	2 1/8	2 15/16	1/2	2.750
2 1/8	2 3/8	3 1/8	9/16	3.000
2 1/4	2 3/8	3 1/4	9/16	3.125
2 3/8	2 1/2	3 3/8	9/16	3.250
2 1/2	2 1/2	3 1/2	9/16	3.375
2 5/8	2 3/4	3 3/4	5/8	3.375
2 3/4	2 3/4	3 7/8	5/8	3.500
2 7/8	2 7/8	4	5/8	3.750
3	2 7/8	4 3/16	5/8	3.875
3 1/8	3 1/8	4 7/16	25/32	4.000
3 1/4	3 1/8	4 9/16	25/32	4.125
3 3/8	3 1/8	4 11/16	25/32	4.250
3 5/16	3 1/8	4 11/16	25/32	4.187
3 1/2	3 1/8	4 13/16	25/32	4.375
3 5/8	3 1/4	4 15/16	25/32	4.500
3 3/4	3 1/4	5 1/16	25/32	4.625
3 7/8	3 3/8	5 3/16	25/32	4.750
4	3 3/8	5 5/16	25/32	4.875