


TYPE 2

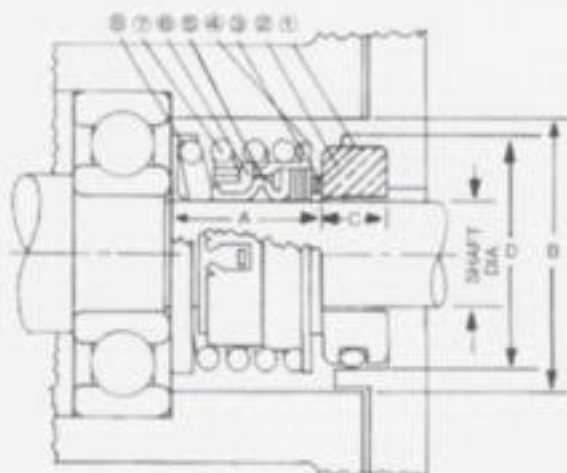

Specification

Used pressure: Below 28kg/cm²
 Revolution speed: Below 4,000 R.P.M.
 Temperature: 90°C (max. 120°C/short time)
 Fluids: Water, Lower alkali liquid,
 Warm water, Lubricant.

Usage

Centrifugal pump
 Revolution pump and transparency pump
 Mixer
 Speed retractor

Sizes In Inches

Shaft Dia	A	B	C	D
3/8	13/16	1 7/32	5/16	.875
1/2	13/16	1 3/8	5/16	1.000
5/8	7/8	1 9/16	13/32	1.250
11/16	7/8	1 5/8	13/32	1.312
3/4	7/8	1 11/16	13/32	1.375
13/16	3/8	1 3/4	13/32	1.437
7/8	15/16	1 13/16	13/32	1.500
15/16	15/16	1 15/16	7/16	1.562
1	15/16	2	7/16	1.625
1 1/16	15/16	2 1/16	7/16	1.687
1 1/8	1 1/16	2 1/8	7/16	1.750
1 3/16	1 1/16	2 3/16	7/16	1.812
1 1/4	1 1/16	2 1/4	7/16	1.875
1 3/8	1 1/8	2 7/16	7/16	2.000
1 7/16	1 1/8	2 1/2	7/16	2.062
1 1/2	1 1/8	2 9/16	7/16	2.125
1 5/8	1 3/8	2 15/16	1/2	2.375
1 3/4	1 3/8	3 1/16	1/2	2.500
1 7/8	1 1/2	3 3/16	1/2	2.625
1 15/16	1 1/2	3 1/4	1/2	2.687
2	1 1/8	3 5/16	1/2	2.750
2 1/8	1 11/16	3 5/8	9/16	3.000
2 1/4	1 11/16	3 3/4	9/16	3.125
2 3/8	1 13/16	3 7/8	9/16	3.250
2 1/2	1 13/16	4	9/16	3.375
2 5/8	1 15/16	4 5/16	5/8	3.375
2 3/4	1 15/16	4 7/16	5/8	3.500
2 7/8	2 1/16	4 9/16	5/8	3.750
3	2 1/16	4 11/16	5/8	3.875
3 1/8	2 3/16	5	25/32	4.000
3 1/4	2 3/16	5 1/8	25/32	4.125
3 3/8	2 3/16	5 1/4	25/32	4.250
3 5/16	2 3/16	5 3/16	25/32	4.187
3 1/2	2 3/16	5 1/2	25/32	4.375
3 5/8	2 5/16	5 11/16	25/32	4.500
3 3/4	2 5/16	5 13/16	25/32	4.625
3 7/8	2 7/16	6	25/32	4.750
4	2 7/16	6 1/8	25/32	4.875