


TYPE 210

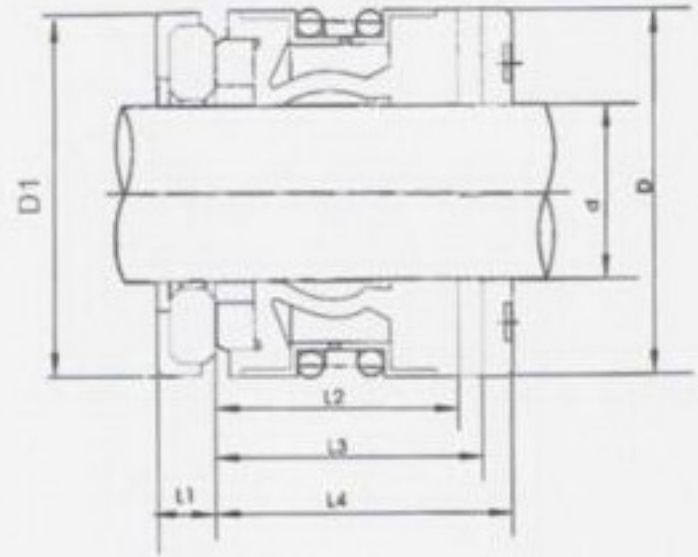

SPECIFICATION

TEMPERATURE: -40°C ~ 220°C

PRESSURE: $\leq 18 \text{ kg/cm}^2$

LINEAR VELOCITY: $\leq 13 \text{ m/sec}$

Sizes In Inches

| d | D | D1 | L1 |
|-------|-------|-------|-------|
| 0.375 | 0.787 | 0.875 | 0.591 |
| 0.500 | 0.945 | 1.000 | 0.591 |
| 0.625 | 1.024 | 1.250 | 0.591 |
| 0.750 | 1.260 | 1.375 | 0.787 |
| 0.875 | 1.417 | 1.500 | 0.787 |
| 1.000 | 1.535 | 1.625 | 0.787 |
| 1.125 | 1.654 | 1.750 | 1.024 |
| 1.250 | 1.811 | 1.875 | 1.024 |
| 1.375 | 1.929 | 2.000 | 1.024 |
| 1.500 | 2.126 | 2.125 | 1.181 |
| 1.625 | 2.205 | 2.375 | 1.181 |
| 1.750 | 2.402 | 2.500 | 1.181 |
| 1.875 | 2.520 | 2.625 | 1.181 |
| 2.000 | 2.598 | 2.750 | 1.181 |
| 2.125 | 2.717 | 3.000 | 1.181 |
| 2.250 | 3.031 | 3.125 | 1.299 |
| 2.375 | 3.150 | 3.250 | 1.299 |
| 2.500 | 3.268 | 3.375 | 1.299 |
| 2.625 | 3.465 | 3.375 | 1.299 |
| 2.750 | 3.504 | 3.500 | 1.299 |
| 2.875 | 3.780 | 3.750 | 1.299 |
| 3.000 | 3.898 | 3.875 | 1.575 |
| 3.125 | 4.055 | 4.000 | 1.575 |
| 3.250 | 4.094 | 4.125 | 1.575 |
| 3.375 | 4.252 | 4.250 | 1.575 |
| 3.500 | 4.409 | 4.375 | 1.575 |
| 3.625 | 4.488 | 4.500 | 1.575 |
| 3.750 | 4.646 | 4.625 | 1.575 |
| 3.875 | 4.803 | 4.750 | 1.575 |
| 4.000 | 4.882 | 4.875 | 1.575 |

Unit:m/m

| d | D | D1 | L1 | L2 | L3 | L4 |
|-----|-----|-----|----|----|------|------|
| 10 | 20 | 21 | 5 | 15 | 27.5 | 35.0 |
| 12 | 22 | 23 | 6 | 15 | 26.5 | 34.0 |
| 14 | 24 | 25 | 6 | 15 | 29.0 | 34.0 |
| 15 | 25 | 26 | 6 | 15 | 29.0 | 34.0 |
| 16 | 26 | 27 | 6 | 15 | 29.0 | 34.0 |
| 18 | 32 | 33 | 6 | 20 | 31.5 | 39.0 |
| 20 | 34 | 35 | 6 | 20 | 31.5 | 39.0 |
| 22 | 36 | 37 | 6 | 20 | 31.5 | 39.0 |
| 24 | 38 | 39 | 6 | 20 | 34.0 | 44.0 |
| 25 | 39 | 40 | 6 | 20 | 34.0 | 44.0 |
| 28 | 42 | 43 | 6 | 26 | 36.5 | 44.0 |
| 30 | 44 | 45 | 7 | 26 | 35.5 | 43.0 |
| 32 | 46 | 48 | 7 | 26 | 35.5 | 48.0 |
| 33 | 47 | 48 | 7 | 26 | 35.5 | 48.0 |
| 35 | 49 | 50 | 8 | 26 | 34.5 | 47.0 |
| 38 | 54 | 56 | 8 | 30 | 37.0 | 47.0 |
| 40 | 56 | 58 | 8 | 30 | 37.0 | 47.0 |
| 43 | 59 | 61 | 8 | 30 | 37.0 | 52.0 |
| 45 | 61 | 63 | 8 | 30 | 37.0 | 52.0 |
| 48 | 64 | 66 | 10 | 30 | 35.0 | 50.0 |
| 50 | 66 | 70 | 10 | 30 | 37.5 | 50.0 |
| 53 | 69 | 73 | 10 | 30 | 37.5 | 60.0 |
| 55 | 71 | 75 | 10 | 33 | 37.5 | 60.0 |
| 58 | 78 | 78 | 10 | 33 | 42.5 | 60.0 |
| 60 | 80 | 80 | 12 | 33 | 40.5 | 58.0 |
| 63 | 83 | 83 | 12 | 33 | 40.5 | 58.0 |
| 65 | 85 | 85 | 12 | 33 | 40.5 | 68.0 |
| 68 | 88 | 90 | 12 | 33 | 40.5 | 68.0 |
| 70 | 90 | 92 | 12 | 33 | 48.0 | 68.0 |
| 75 | 95 | 97 | 12 | 40 | 48.0 | 68.0 |
| 80 | 104 | 105 | 14 | 40 | 47.5 | 77.5 |
| 85 | 109 | 110 | 14 | 40 | 47.5 | 77.5 |
| 90 | 114 | 115 | 14 | 40 | 52.5 | 77.5 |
| 95 | 119 | 120 | 14 | 40 | 52.5 | 77.5 |
| 100 | 124 | 125 | 14 | 40 | 52.5 | 77.5 |

ERVING