


TYPE 3

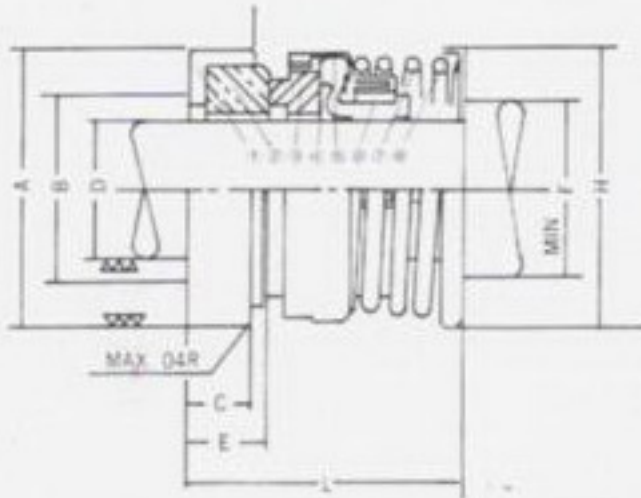

Unit:m/m

SIZE	D	A	B	C	E	F	H	L
8	8	18/21	13	4.5	5.0	12	17.6	18
9	9	24	16	6	7.0	13	21.3	23
10	10	24	16	6	7.0	14	21.3	23
11	11	24	16	6	7.0	15	21.3	23
12	12	26	17	6	7.0	16	23.8	24
14	14	28	21	6	6.5	17.5	27.0	25
15	15	28	21	6	6.5	17.5	27.0	25
16	16	32	22	6	7.0	18.5	27.0	27
17	17	32	22	6	8.0	21	30.1	27
18	18	35	25	6	8.0	22	30.1	26
19	19	35	25	6	8.0	23	30.1	26
20	20	38	27	6	8.0	23	33.3	28
22	22	40	29	6	8.5	25	33.3	28
25	25	44	32	7	8.5	28	40.0	29
28	28	46	34	7	8.5	31	46.0	30
30	30	50	38	7	9.0	33	49.2	31
32	32	54	40	7	9.0	35	49.2	33
35	35	58	44	8	10.5	38	52.3	36
38	38	60	46	8	10.5	41	55.5	37
40	40	64	48	8	11.0	43	63.5	38
45	45	66	52	8	11.0	48	66.6	40
50	50	72	58	8	11.0	53	73.0	42

Unit:m/m

SIZE	D	A	B	C	E	F	H	L
3/8	9.525	22.225	14.275	6.350	7.925	12.700	20.625	28.575
1/2	12.700	25.400	17.450	6.350	7.925	15.875	23.800	28.575
5/8	15.875	31.750	20.625	8.712	10.287	19.050	26.970	32.500 28.575
3/4	19.050	34.925	23.800	8.712	10.287	22.250	30.150	32.500 28.575
7/8	22.225	38.100	26.970	8.712	10.287	25.400	33.325	34.100
1	25.400	41.275	30.150	9.525	11.100	28.575	42.850	36.500
1-1/8	28.575	44.450	33.325	9.525	11.100	31.750	46.025	38.070
1-1/4	31.750	47.625	36.500	9.525	11.100	34.925	49.200	38.070
1-3/8	34.925	50.800	39.675	9.525	11.100	38.100	52.375	39.680
1-1/2	38.100	53.975	42.850	9.525	11.100	41.275	55.550	39.680
1-5/8	41.275	60.325	46.025	11.100	12.700	44.450	63.500	47.625
1-3/4	44.450	63.500	49.200	11.100	12.700	47.625	66.675	47.625
1-7/8	47.625	66.675	52.375	11.100	12.700	50.800	69.850	50.800
2	50.800	69.850	55.550	11.100	12.700	53.975	73.025	50.800

P/NO	Part Name	Material
1	Cup Gasket	NBR
2	Mating Ring	Ceramic
3	Seal Ring	Carbon
4	Rubber Diaphragm	NBR
5	Retainer	Stainless Steel
6	Drive Ring	Stainless Steel
7	Coil Spring	Stainless Steel
8	Spring Holder	Stainless Steel

Specification

Used pressure: Below 5kg/cm²

Revolution speed: Below 4,000 R.P.M.

Temperature: 90°C (Max. 120°C/shaft time)

Fluids: water, Lower alkali liquid, Warm water, Lubricant.

Usage

Centrifugal pump

Revolution pump and transparency pump

Mixer

Speed retractor

Tolerance: D: ±0.05 A: $\begin{matrix} +0.03 \\ -0 \end{matrix}$ L: ±0.3