


TYPE 5

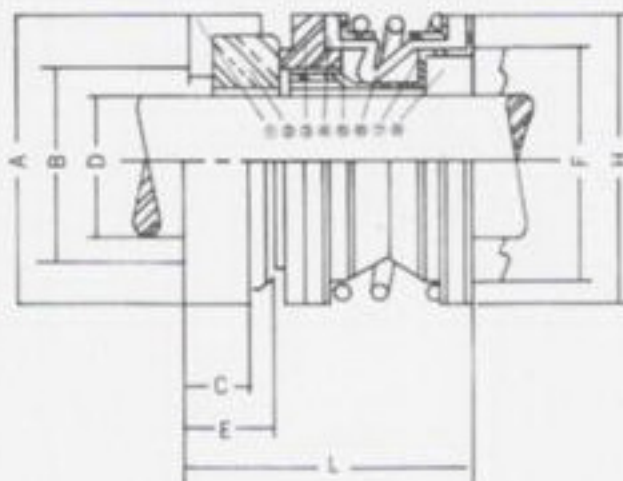

Specification

Used pressure: Below 5kg/cm²
 Revolution speed: Below 3,600 R.P.M.
 Temperature: 90°C
 Fluids: Cleaned water, Lower alkali liquid,
 Warm water.

Usage

Pump for household use
 Gear pump
 Mixer

Tolerance: D: ±0.05 A: $\begin{matrix} +0.03 \\ -0 \end{matrix}$ L: ±0.3

P/NO	Part Name	Material
1	Cup Gasket	NBR
2	Mating Ring	Ceramic
3	Seal Ring	Carbon
4	Rubber Bellows	NBR
5	Spring Holder	Brass
6	Coil Spring	Stainless Steel
7	Coil Spring	Brass
8	Drive Ring	NBR

Unit: m/m

SIZE	D	A	B	C	E	F	H	L
1/2	12.700	25.400	17.450	6.350	7.925	20.625	26.970	24.587
5/8	15.875	31.750	20.625	8.712	10.287	23.800	30.937	28.575
3/4	19.050	34.925	23.800	8.712	10.287	26.970	34.112	28.575
1	25.400	41.275	30.150	9.525	11.100	33.325	42.850	31.725