


TYPE 502

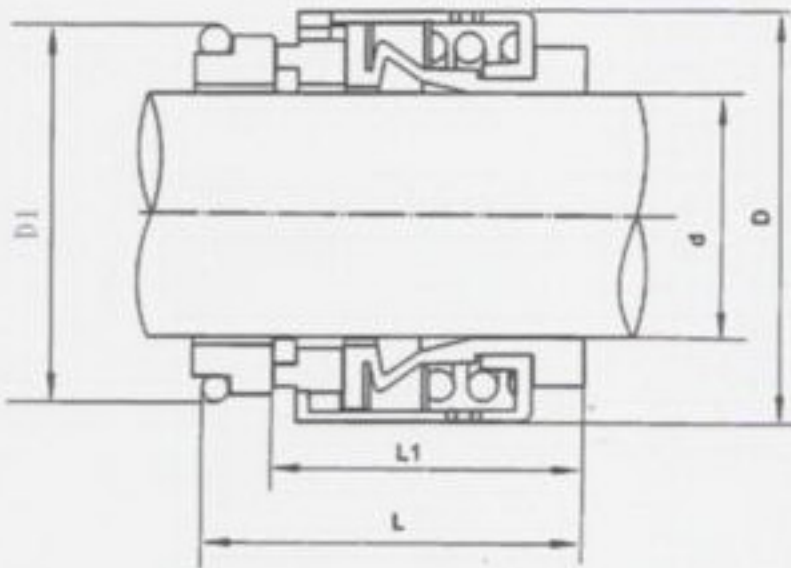

USAGE

mostly for oil, water, and other low corrosion mediums.

SPECIFICATION

Temperature: -30°C~200°C

Pressure: <40kg/cm²

Speed: <20m/sec

Unit:m/m

d	D	D1	L	L1
14	24	25	34.75	23.3
16	26	27	34.75	23.3
18	32	33	37.30	24.3
20	34	35	37.30	24.3
22	36	37	37.30	24.3
24	38	39	39.80	27.0
25	39	40	39.80	27.3
28	42	43	42.30	30.3
30	44	45	42.40	30.8
32	46	48	42.40	30.8
33	47	48	42.40	30.8
35	49	50	43.40	30.8
38	54	56	44.90	32.3
40	56	58	44.90	32.3
43	59	61	44.90	32.3
45	61	63	44.90	32.3
48	64	66	45.50	32.3
50	66	70	47.40	34.3
53	69	73	47.40	34.3
55	71	75	47.40	34.3
58	78	78	52.40	39.3
60	80	80	52.40	39.3
63	83	83	52.40	39.3
65	85	85	51.60	39.3
68	88	90	52.60	39.3
70	89	92	60.20	45.3
75	96	97	60.20	45.3
80	104	105	60.20	45.3
85	108	110	60.20	45.3
90	114	115	65.20	50.3
95	118	120	65.20	50.3
100	124	125	65.20	50.3