


TYPE 9

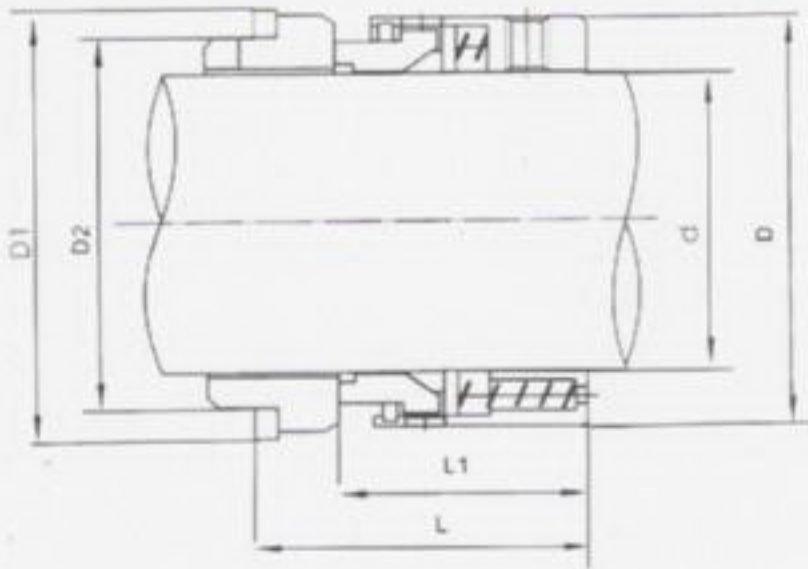

Unit:m/m

d	D	D1	D2	L	L1
14	24.3	25	21	35.0	23.0
16	26.3	27	23	35.0	23.0
18	32.3	33	27	37.5	24.0
20	34.3	35	29	37.5	24.0
22	36.3	37	31	37.5	24.0
24	38.3	39	33	40.0	26.7
25	39.3	40	34	40.0	27.0
28	42.3	43	37	42.5	30.0
30	44.3	45	39	42.5	30.5
32	46.3	48	42	42.5	30.5
33	47.3	48	42	42.5	30.5
35	49.3	50	44	42.5	30.5
38	54.3	56	49	45.0	32.0
40	56.3	58	51	45.0	32.0
43	59.3	61	54	45.0	32.0
45	61.3	63	56	45.0	32.0
48	64.3	66	59	45.0	32.0
50	66.3	70	62	47.5	34.0
53	69.3	73	65	47.5	34.0
55	71.3	75	67	47.5	34.0
58	78.3	78	70	52.5	39.0
60	80.3	80	72	52.5	39.0
63	83.3	83	75	52.5	39.0
65	85.3	85	77	52.5	39.0
68	88.3	90	81	52.5	39.0
70	90.3	92	83	60.0	45.5
75	95.3	97	88	60.0	45.5
80	104.3	105	95	60.0	45.0
85	109.3	110	100	60.0	45.0
90	114.3	115	105	65.0	50.0
95	119.3	120	110	65.0	50.0
100	124.3	125	115	65.0	50.0

Main Characteristics

- Maostly Use:perroleum Products,
- Chemical Solvents, Low And Middle Corrosion
- Acids And Other Similar Liquids.
- Temperature In The Sealed Chamber: -40°C~200°C
- Pressure In The Sealed Chamber: ≤8kg/cm²
- Linear Velocity: ≤20m/Sec