

TYPE BW




Specification

Temperature: -40°C ~ 220°C

Pressure: 20kg/cm

speeds: 25m/sec

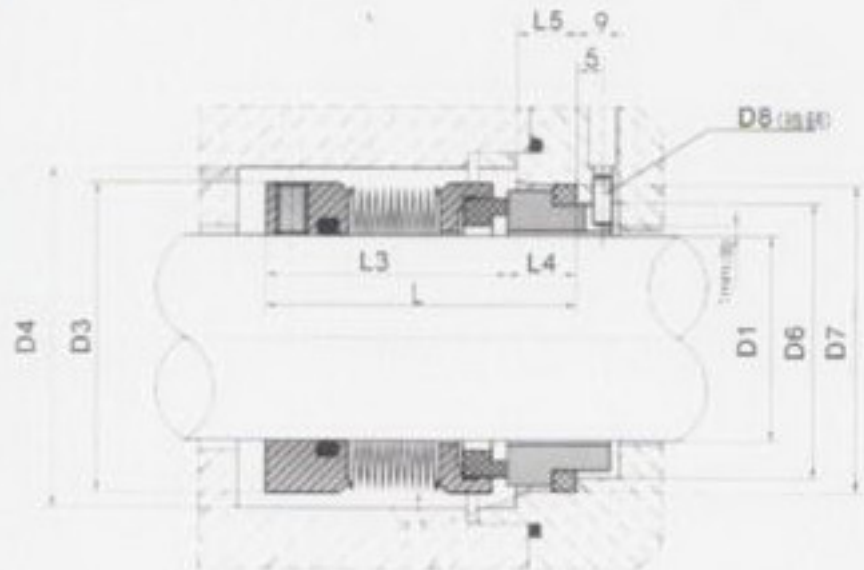

Unit: m/m

SIZE	D1	D3	D4	D6	D7	D8	L	L3	L4	L5
30	30	48.0	50	39	45	3	52.0	40	12.0	7.0
35	35	51.0	54	44	50	3	52.0	40	12.0	7.0
40	40	62.0	65	51	58	4	60.0	47	13.0	8.0
45	45	67.0	70	56	63	4	65.0	52	13.0	8.0
50	50	72.0	75	62	70	4	65.5	52	13.5	8.5
55	55	78.0	82	67	75	4	68.5	55	13.5	8.5
60	60	83.0	87	72	80	4	68.5	55	13.5	8.5
65	65	88.0	92	77	85	4	68.5	55	13.5	8.5
70	70	97.0	101	83	92	4	69.5	55	14.5	9.5
75	75	98.0	102	88	97	4	69.5	55	14.5	9.5
80	80	103.0	107	95	105	4	73.0	58	15.0	10.0
85	85	108.0	112	100	110	4	73.0	58	15.0	10.0
90	90	114.5	120	105	115	4	73.0	58	15.0	10.0
95	95	120.0	125	110	120	4	75.0	60	15.0	10.0
100	100	124.0	130	115	125	4	75.0	60	15.0	10.0