


TYPE BW

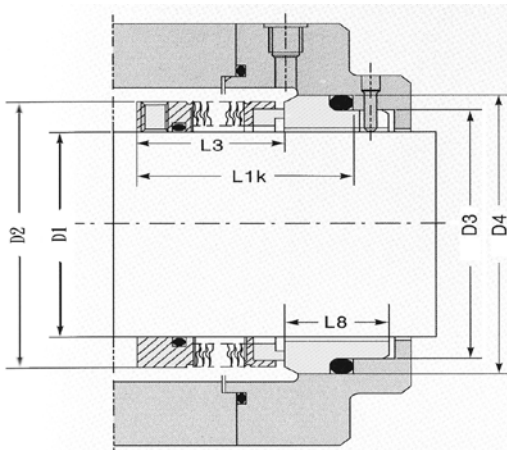

Shaft D1	D2	D3	D4	L3	L1K	L8
16	30.0	23	27	32.5	42.5	17.5
18	32.0	27	33	30.5	37.5	14.0
20	33.5	29	35	30.5	37.5	14.0
22	36.5	31	37	30.5	37.5	14.0
24	39.0	33	39	28.5	40.0	19.5
25	39.6	34	40	28.5	40.0	19.5
28	42.8	37	43	31.0	42.5	19.5
30	45.0	39	45	31.0	42.5	19.5
32	46.0	42	48	31.0	42.5	19.5
33	48.0	42	48	31.0	42.5	19.5
35	49.2	44	50	31.0	42.5	19.5
38	52.3	49	56	31.0	45.0	22.0
40	55.5	51	58	31.0	45.0	22.0
43	57.5	54	61	31.0	45.0	22.0
45	58.7	56	63	31.0	45.0	22.0
48	61.9	59	66	31.0	45.0	22.0
50	65.0	62	70	32.5	47.5	23.0
53	68.2	65	73	32.5	47.5	23.0
55	70.0	67	75	32.5	47.5	23.0
58	71.7	70	78	37.5	52.5	23.0
60	74.6	72	80	37.5	52.5	23.0
63	79.0	75	83	37.5	52.5	23.0
65	84.1	77	85	37.5	52.5	23.0
68	87.3	81	90	34.5	52.5	26.0
70	87.3	83	92	42.0	60.0	26.0
75	95.0	88	97	42.0	60.0	26.0
80	98.4	95	105	41.8	60.0	26.2
85	104.7	100	110	41.8	60.0	26.2
90	111.0	105	115	46.8	65.0	26.2
95	114.0	110	120	47.8	65.0	25.2
100	117.4	115	125	47.8	65.0	25.2

Specification

Temperature: -40°C ~ 220°C

Pressure: 20 kg/cm

Speeds: 25 m/sec

Standard Materials :

Stationary Ring : Carbon / SIC / TC

Rotary Ring) : Ceramic / SIC / TC

Metal parts : SUS 304 / SUS316

